



# CELLAR280

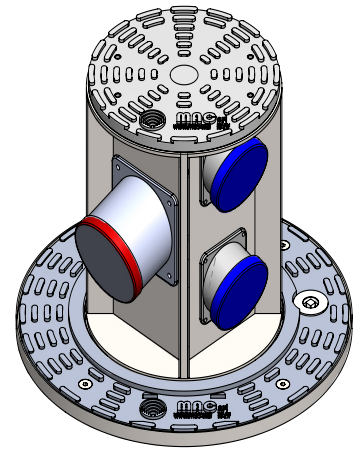

## ELECTRIFIED COCKPIT

- HEAD AND PLATFORM IN ALUMINIUM
- STRUCTURE IN STAINLESS STEEL
- LIFTING WITH DRILL OR BY KEY
- LED: OPTIONAL

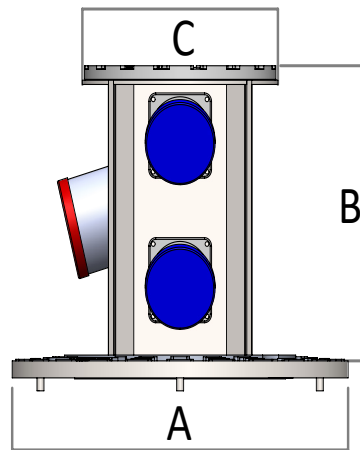

U.M. = mm		
A	B	C
481	420	280

CELLAR280		
THICKNESS OF THE PLATES	mm	10
DIAMETER OF THE COCKPIT	mm	280
DIAMETER OF THE PLATFORM	mm	481
MATERIAL OF THE STRUCTURE		AISI304
MATERIAL HEAD AND PLATFORM		ALUMINIUM
LOADING CLASS		C250

• = standard equipment

CELLAR280	0903000	
KIT A	0903000-A	
KIT B	0903000-B	
KIT C	0903000-C	
KIT D	0903000-D	

KIT A	KIT B	KIT C	KIT D
<p><b>SIDE 1:</b> (16 MODULES)</p> <p>1 PURE DIFF. SWITCH 4X63A 0,003A 1 MAGN. SWITCH 4X32A 6KA 4 MAGN. SWITCH 2X16A 6KA</p> <p><b>SIDE 2:</b> 2 SOCKETS 2X16A+T IP67</p> <p><b>SIDE 3:</b> 1 THREEP. SOCKET 3X32A+N+T IP67</p> <p><b>SIDE 4:</b> 2 SOCKETS 2X16A+T IP67</p>	<p><b>SIDE 1:</b> (16 MODULES)</p> <p>1 PURE DIFF. SWITCH 4X63A 0,003A 1 MAGN. SWITCH 3X32A 6KA 4 MAGN. SWITCH 2X16A 6KA</p> <p><b>SIDE 2:</b> 2 SOCKETS 2X16A+T IP67</p> <p><b>SIDE 3:</b> 1 THREEP. SOCKET 3X32A+T IP67</p> <p><b>SIDE 4:</b> 2 SOCKETS 2X16A+T IP67</p>	<p><b>SIDE 1:</b> (16 MODULES)</p> <p>1 PURE DIFF. SWITCH 4X63A 0,003A 2 MAGN. SWITCH 4X16A 6KA 4 MAGN. SWITCH 2X16A 6KA</p> <p><b>SIDE 2:</b> 2 SOCKETS 2X16A+T IP67</p> <p><b>SIDE 3:</b> 2 THREEP. SOCKETS 3X16A+N+T IP67</p> <p><b>SIDE 4:</b> 2 SOCKETS 2X16A+T IP67</p>	<p><b>SIDE 1:</b> (16 MODULES)</p> <p>1 PURE DIFF. SWITCH 4X63A 0,003A 2 MAGN. SWITCH 3X16A 6KA 4 MAGN. SWITCH 2X16A 6KA</p> <p><b>SIDE 2:</b> 2 SOCKETS 2X16A+T IP67</p> <p><b>SIDE 3:</b> 2 THREEP. SOCKETS 3X16A+T IP67</p> <p><b>SIDE 4:</b> 2 SOCKETS 2X16A+T IP67</p>